

# SmartFlex

## SR310

Industrial Cellular  
Routers & Gateways

Flexible 4G Routers & IoT Gateways



### Introduction

SmartFlex SR310 cellular router provides secure Internet connectivity for devices and LANs via cellular networks. It provides automatic wireless failover for wired networks, wireless connectivity for devices in remote locations such as industrial PCs, HMI's, traffic controllers, kiosks, meters, cameras, and much more.

SmartFlex serves well also for applications that require video transmitting because of download speed up to 150 Mbps and upload speed up to 50 Mbps.

Modular SmartFlex design can be ordered in many hardware options. Standard hardware configuration always includes 2 Ethernet 10/100 ports with 2 independent LANs/IP addresses – optionally with POE+ PSE or POE PD feature – 1 USB host port, 1 microSD cardholder, 2 SIM card holders for automatic failover to an alternate service provider, 2 binary inputs (I/O), 1 binary output (I/O), and onboard GPS/Glonass receiver.

As an extension to hardware interface options above can be modified by an additional 3x 10/100 ETH board (so totally up to 5 Ethernet ports configured for 3 independent LANs/IP addresses) or combined Ethernet/RS-232/485 board or RS-232/485 board (isolation strength up to 2.5kV). An optional built-in Wi-Fi module also available with industrial-grade operating temperature ranges from -40 to +75 °C.

SmartFlex transfer intelligence at the network edge with a powerful Cortex A8 CPU, 256 MB flash memory, 512 MB RAM, and 128kB M-RAM.

A secure Web interface allows users to configure and manage SmartFlex from remote locations. The SmartFlex supports real-time data encryption and the creation of VPN tunnels using IPsec, OpenVPN, GRE, etc. It supports standard and advanced networking features like DHCP, NAT, NAT-T, DynDNS, NTP, VRRP, control by SMS, and numerous other functions.

With an open Linux platform and the wide possibility of programming customer SW applications in Python, C/C++ or browser-based flow editor Node-RED the SmartFlex offers a real open development platform for Industrial IoT applications. The Advantech existing Router App library (User modules) with apps already developed to enhance specific router functionalities include industrial protocol conversions and support of IoT platforms such as MS Azure, Cumulocity, and others.

SmartFlex is easy to install individually and in mass deployments scenarios too by using a full-featured configuration and monitoring software tool WebAccess/DMP. Safe remote VPN access to customer devices and PCs connected to routers through Internet can be administrated by additional software WebAccess/VPN.

### Features

- Global LTE Cat.4 high speed connectivity with 3G fallback
- US carriers support; Verizon, AT&T, T-Mobile
- 2x SIM for redundancy
- Flexible port options: 2 – 5x Ethernet 10/100 Mbps, Isolated RS-232/422/485 and isolated 2x DI, 1x DO
- GPS and GLONASS support
- Optional industrial-grade Wi-Fi
- Optional 2x PoE+ PSE or 1x PoE PD
- Wide operational temperature range
- DIN mount
- Linux based OS & SW customization
- Advanced security features

### Ordering Information

Note: Check with your local distributor for availability, options, and HW configuration. Contact Advantech distributors.

SmartFlex Family

SR310 router, 2x ETH, 1x USB, 2x DI, 1x DO, MicroSD reader, 2x SIM reader

**BB - SR310BCCDE**

#### Accessories

- |   |  |
|---|--|
| 0 | No Accessories (DIN holder included)         |
| 1 | Accessories with EU power supply             |
| 5 | International Power Supply (EU, US, UK, AUS) |

#### Enclosure

- |   |                   |
|---|-------------------|
| 1 | Plastic enclosure |
| 2 | Metal enclosure   |

#### Interfaces

- |   |                                |
|---|--------------------------------|
| 0 | 2x ETH                         |
| 1 | 2x ETH, 3x ETH Switch          |
| 3 | 2x ETH, 1x RS232, 1x RS485/422 |
| 4 | 3x ETH, 1x RS232, 1x RS485     |

#### PoE

- |   |            |
|---|------------|
| 0 | No PoE     |
| 8 | 2x PoE PSE |
| 9 | PoE PD     |

#### WiFi

- |   |                    |
|---|--------------------|
| 0 | No WiFi            |
| 1 | WiFi (2.4 & 5 GHz) |



**WebAccess/DMP**

**WebAccess/VPN**



**AT&T**

**verizon**

**T-Mobile**

**ADVANTECH**

Industrial Cellular Gateways & Routers

All product specifications are subject to change without notice.

Last updated: 18-May-2023

### Specifications

System		Environmental
CPU	ARM Cortex-A8, 1000 MHz	Power Supply 10 – 60 V DC (2-Way Molex connector)
Memory	RAM - 512 MB NOR Flash - 256 MB MRAM - 128 kB (128 MB for Router APPs, 128 kB for customer data)	Consumption Idle 2.5 W / Average 4 W / Peak 11 W
Watchdog	HW Watchdog	Sleep Mode Yes, 10 mW
RTC	Battery backup RTC	Operating Temperature -40 to +75 °C
Interfaces		Storage Temperature -40 to +85 °C
Ethernet	2x Ethernet, RJ45, 10/100 Mbps, Isolation 1.5 kV	Humidity 5 to 95 %
Port expansion option BB-SR310xx1xx	3-port Ethernet switch, RJ45, 10/100 Mbps, Isolation 1.5 kV	IP Cover IP30
Port expansion option BB-SR310xx3xx	1x RS232 (Tx, Rx, GND, RTS, CTS), 5-pin terminal block, Isolation 2.5 kV 1x RS485/422 (2x TxRx+, 2x TxRx-), 4-pin terminal block, Isolation 2.5 kV	
Port expansion option BB-SR310xx4xx	1x Ethernet, RJ45, 10/100 Mbps, Isolation 2.5 kV 1x RS232 (AUX, GND, Tx, Rx), 4-pin terminal block (no isolation) 1x RS485 (TxRx+, TxRx-, GND), 3-pin terminal block, Isolation 2.5 kV	
I / O	2x Digital Input (60 V AC/DC, 7 mA) 1x Digital Output (60 V AC/DC 300 mA) (6-Way Molex connector)	Physical Characteristics
USB	1x USB 2.0 Host Connector	Dimensions 55 × 97 × 125 mm
MicroSD Card	1x Micro SD Card Slot (SDHC, SDXC)	Enclosure Robust Metal Case or Plastic Case
Reset Button	Factory reset	Mounting DIN Rail
LED Indicators	System-power, Data activity, 3-level signal strength, SIM1/SIM2 status, PoE status, Input 0 status, Input 1 status, Output state, User, ETH	Weight Metal version: 375 g Plastic version: 170 g
GNSS		WiFi - Optional
Antenna	1x SMA connector, active (50 mA)	Antenna 1x R-SMA connectors
Systems	GPS, GLONASS, BeiDou, Galileo	Standards IEEE802.11 a/b/g/n 2.4 GHz / 5 GHz
Protocol	NMEA 0183 v3.0	Security WEP, TKIP, AES, WPA, WPA2, 802.1X
Ac Time-to-First-Fix	Hot start 1 s, Warm start: 29 s, Cold 32 s	Modes Access Point (max 10 clients), Station, Multirole STA & AP
PoE PD: parameters for opposite PSE device - Optional		PoE PD: parameters for opposite PSE device - Optional
Input voltage range	42.5 – 57 V DC, IEEE 802.3af-2003	Input voltage range 42.5 – 57 V DC, IEEE 802.3af-2003
Power available	25.50 W	Power available 25.50 W
Maximum current	600 mA	Maximum current 600 mA
PoE+ PSE parameters - Optional		PoE+ PSE parameters - Optional
Power supply needed	42.5 – 57 V DC	Power supply needed 42.5 – 57 V DC
Power available	2x 25.50 W (ETH0, ETH1), IEEE 802.3at-2009 (PoE+)	Power available 2x 25.50 W (ETH0, ETH1), IEEE 802.3at-2009 (PoE+)
Cellular Interface		Cellular Interface
SIM Slots	2x SIM (Mini SIMs – 2FF)	
Antennas	2x SMA connector (1x Main, 1x Diversity)	
LTE Parameters	Supported FDD frequencies: B1 (2100 MHz)/ B2 (1900 MHz)/ B3 (1800 MHz)/ B4 (1700 MHz)/ B5 (850 MHz)/ B7 (2600 MHz)/ B8 (900 MHz)/ B12 (700 MHz)/ B13 (700 MHz)/ B18 (800 MHz)/ B19 (800 MHz)/ B20 (800 MHz)/ B25 (850MHz)/ B26 (850 MHz)/ B28 (700 MHz) Supported TDD frequencies: B38 (2600 MHz)/ B39 (1900 MHz)/ B40 (2300 MHz)/ B41 (2500 MHz) Transfer rate: up to 150 Mbps (DL), 50 Mbps (UL)	
HSPA+/UMTS Parameters	Supported frequencies: B1 (2100 MHz)/ B2 (1900 MHz)/ B4 (1700 MHz)/ B5 (850 MHz)/ B6 (800 MHz)/ B8 (900 MHz)/ B19 (800 MHz) Transfer rate: 42 Mbps (DL), 5.76 Mbps (UL)	
EDGE/GPRS Parameters	Supported frequencies: B2 (1900 MHz)/ B3 (1800 MHz)/ B5 (850 MHz)/ B8 (900 MHz) Transfer rate: 296Kbps (DL), 236.8Kbps (UL)	
Standards & Regulations		Standards & Regulations
Radio	EN 301 511, EN 301 908-1, EN 301 908-2, EN 301 908-13, EN 303 413, EN 301 893, EN 300 328, FCC part 22H, FCC part 24E, FCC part 27, FCC part 90R, PTCRB	
EMC	ETSI EN 301 489-1, ETSI EN 301 489-17, ETSI EN 301 489-19, ETSI EN 301 489-52, EN 55032, EN 61000-4-2, EN IEC 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, IEC 61000-6-2, IEC 61000-6-3, FCC Part 15 Subpart B, ICES-003 Issue 6	
Safety	EN IEC 62368-1, UL E487720	
National	CE, TELEC (Japan), UKCA, FCC, IC	
Carrier Approval	AT&T, T-mobile, Verizon	
Mechanical	EN 60068-2-64, EN 60068-2-27	
Climatic	EN 60068-2-1, EN 60068-2-2, EN 60068-2-14, EN 60068-2-30	
Environmental	RoHS3, Reach, WEEE	

Industrial Cellular Gateways & Routers

Online Download [www.advantech.com/products](http://www.advantech.com/products)

## SmartFlex SR310

### Software

Operating System	ICR-OS (Linux based)
SW Customization	Router App (User Modules)*
Application Development	Open Linux, *Python, BASH, C/C++, *Node-RED
Industrial Protocols and IoT	*Modbus RTU/TCP gateway, *IEC 60870-5-101 to 104 gateway, *DF1, *DNP3, *MQTT, *LWM2M
Networking Features and Protocols	DHCP, NAT/PAT, SSH, VRRP, PPPoE, SNMP, SMTP, Dynamic DNS client, DNS proxy, VLAN, QoS, *DMVPN, NTP Client/Server, *Routing protocols RIP, BGP, OSPF, IS-IS, NHRP, Backup Routes, Port Forwarding, Host Port Routing, Ethernet Bridging, Load Balancing, IPv6 Dual Stack
Security	HTTPS, SSH, SFTP, DMZ, Firewall (IP Filtering, MAC address filtering, Inbound and outbound Port filtering) VPN Tunneling – WireGuard, OpenVPN, *EasyVPN, IPsec with IKEv1 and IKEv2, GRE, L2TP, PPTP Authentication – RADIUS, TACACS+, 2FA, *SCEP Encryption – DES, 3DES, AES, RSA, MD5, SHA
Firmware Management	Automatic firmware updates – server, locally via LAN or remotely via WAN Over-the-Air cellular module firmware updates
Diagnostic/Log	Status – Signal Strength, Data Usage, Detailed Long Term Statistics One CLICK report – Current Configuration, Factory Identification, Routing Table Log – System Log, Reboot Log, Kernel Log Remote Diagnostics (via SSH)
Event Engine	StartUp script & Up/Down script (Own rules based on Digital Inputs, Network Parameters, Data Usage, Timer, Power, Device Temperature) Report Types: SMS, email, SNMP Trap
Configuration	Web server, SSH, Four configuration switchable profiles, Automatic configuration update from server, Backup & Restore configuration
Advanced Software Tools	WebAccess/DMP – Remote Device Provisioning, Monitoring & Management Platform WebAccess/VPN – Advanced Secure Networking Platform

\*Functionality is available with installed RouterApp (User Module)

### Accessories

Part Number	Description	Included in Package	Included in Package	Sold Separately
BB-2JW0124Z-C868B	Antenna LTE, Terminal	✓		✓
BB-GA.110.101111	Antenna LTE, Magnet Mount			✓
BB-AW-A2458G-FSRPK	Antenna Wi-Fi, 2.4 & 5.8 GHz	✓ BB-SR310xxx5		✓
BB-RPS-v3-M02-M	SmartFlex Power Supply, 12V/1A, EU,US,UK,AU	✓		✓
BB-RPS-v3-M02-EU	SmartFlex Power Supply, 12V/1A, EU plug			✓
BB-RPS-v3-PSE	SmartFlex Power Supply, 48V/1.35A (power cord required)			✓
BB-PWRCORD-US	US Power Supply Power Cord			✓
BB-PWRCORD-EU	EU Power Supply Power Cord			✓
BB-PWRCORD-UK	UK Power Supply Power Cord			✓
BB-PWRCORD-AU	AU Power Supply Power Cord			✓
BB-SBD40	DIN Rail Clip - metal	✓ BB-SR310xxx2x	✓ BB-SR310xxx20	✓
BB-CPD3	DIN Rail Clip - plastic	✓ BB-SR310xxx1x	✓ BB-SR310xxx10	✓
BB-KN-v3-M02-3	PS Cable 2-wire, M0 2 pins, 3m, v3 routers		✓	✓
BB-KIO-v3-M06-3	IO Cable 6-wire, 3m, v3 routers			✓
BB-KD-ETH	Ethernet cross cable	✓		✓


For more Antenna accessories visit [www.advantech.com](http://www.advantech.com).

# Industrial Cellular Routers & Gateways


## SmartFlex SR310

### Views


FRONT VIEW - BB-SR310xx0xx

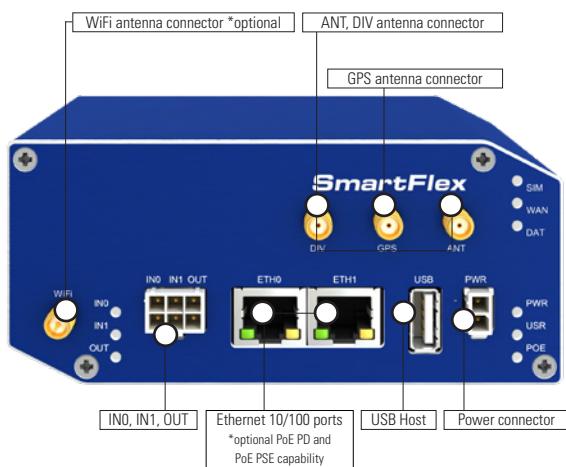


FRONT VIEW - BB-SR310xx1xx

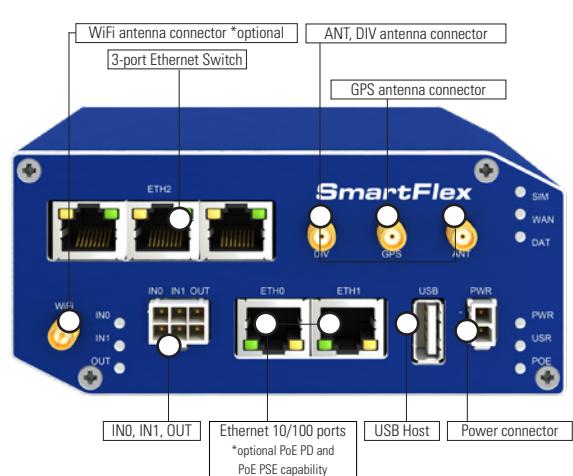


FRONT VIEW - BB-SR310xx3xx

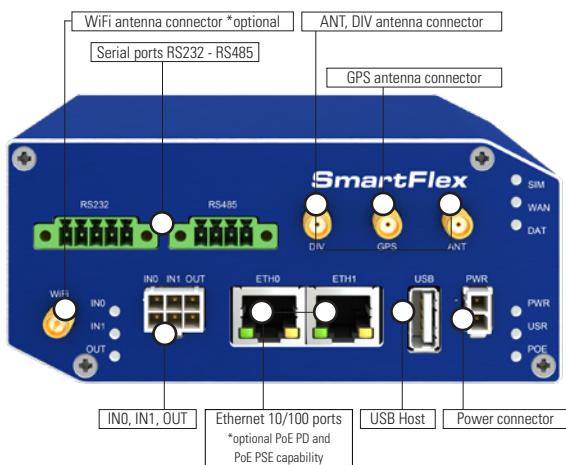


FRONT VIEW - BB-SR310xx4xx

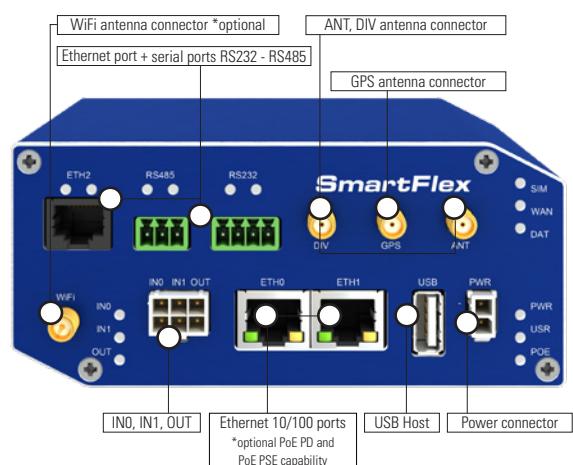

REAR VIEW

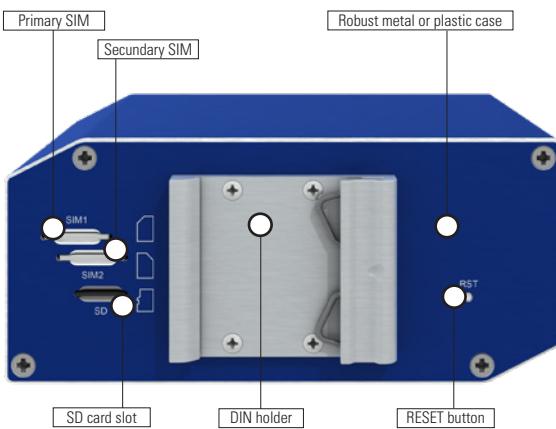

### Basic Dimensions - Metal version

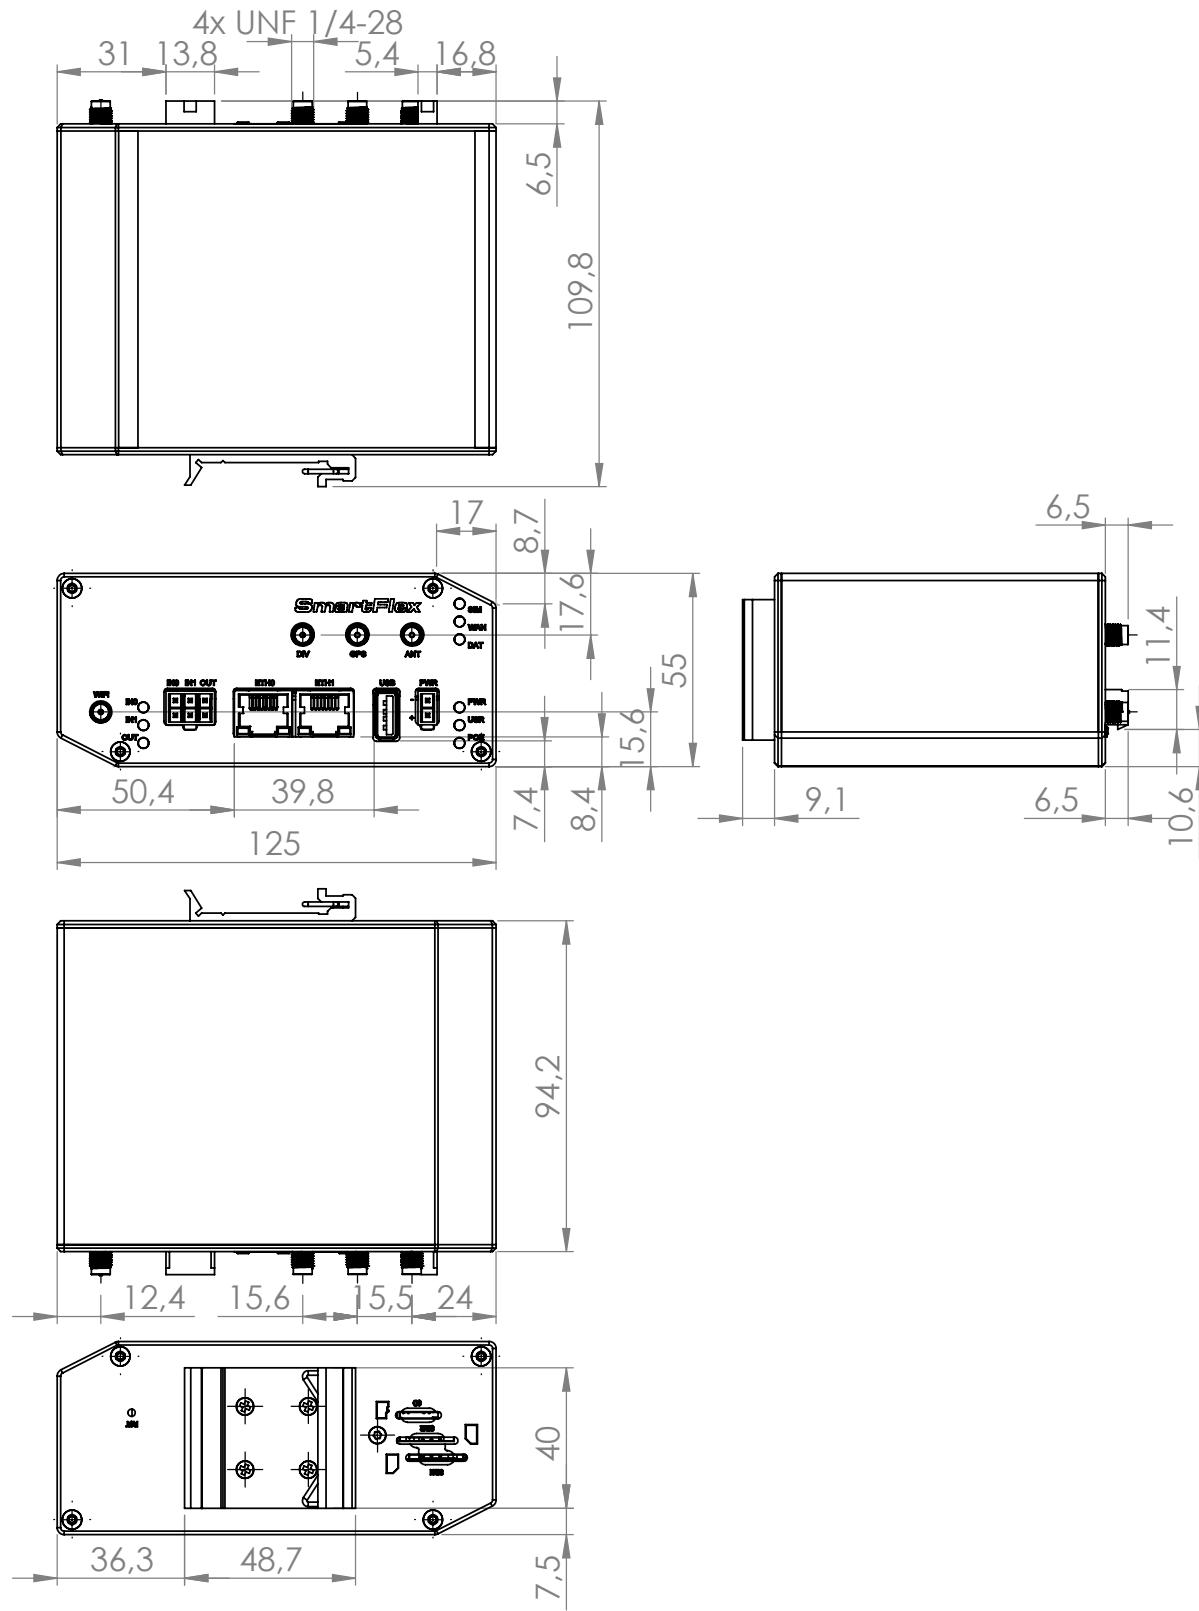

### Basic Dimensions - Plastic version

